

# Product line 55


## Mortice lock

according to DIN 18251-1  
Class 5

for high usage doors  
with high user frequency  
and increased burglar proofness



Classification code according to EN 12 209										
3	S	5	1	0	G	6	B	C	2	0

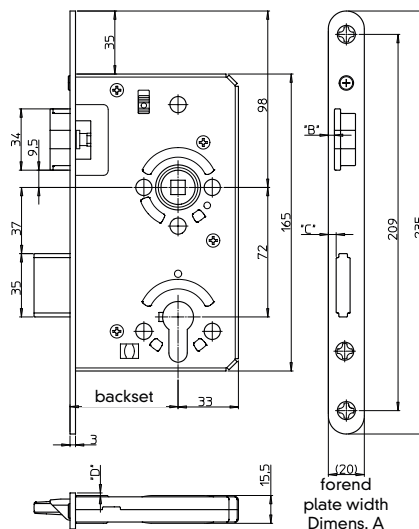

Dimens. A	Dimens. B	Dimens. C	Dimens. D
20	3.4	4.0	1.4
24	6.0	6.6	4.0

Mortice lock	ES
Product line 55	55
- PZ double-turn with key operated spring bolt	PZW
- WC type	WC
flat rounded forend plate	FR
forend plate width - 20 / 24 mm	20
backset sizes - 55 / 60 / 65 mm	55
centres - PZ 72 mm	72
- WC 78 mm	78
square follower size - 8 mm	08
handing - right hand	RS
- left hand	LS
forend plate design - Stainless steel non-corroding precision-ground (Material no. 1.4301)	EST
Equipment:	
· clamping follower made of steel galvanized	
· follower support of steel rings	
· latch precision cast nickel-plated	
· bolt made of high-strength refined special steel	
· bolt head cast nickel-plated	
· lock case all-around closed, galvanized and lacquered	
· sleeved bolt through fixing points	
· noise reduction for latch and follower	
· relubrication system	

## Options:

- flat forend edged FK
  - Front plate colours on stainless steel lacquered
    - silver metallic silb
    - white white
  - Front plate material
    - Brass polished (not for FH design) mspo
  - backset 70 / 80 / 100 mm 70
  - square follower 9 mm (FH design) 09
  - square follower 10 mm 10
- (Consider delivery times)



Fig.: WC type

Example for article identification

ES 55 PZW FR 20 / 55 72 08 RS EST

ES 55 WC FR 20 / 55 78 08 RS EST