

Product line 52 NV


Mortice lock

for non-rebated doors, centre variant, non-handed, for heavily used doors requiring enhanced resistance to burglary according to DIN 18 251-1 Class 5



Classification code according to EN 12 209:

3	S	5	1	0	G	6	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---

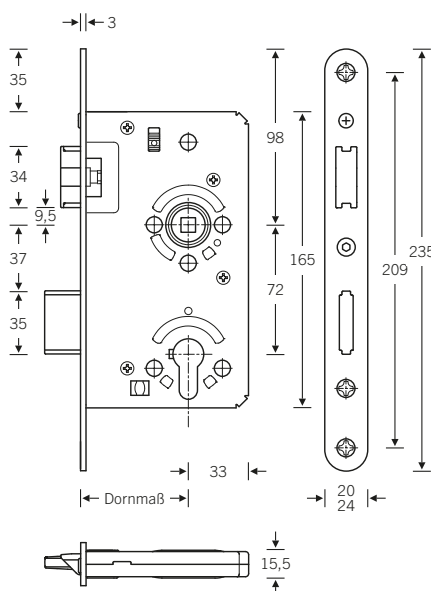

Mortice lock ES
Product line 52 52

PZ double-turn with key operated anti-thrust bolt PZW WC

flat rounded: FR

forend plate width:
– 20 / 24 mm 20

backsets:
– 55 / 60 / 65 mm 55

centres:
– PZ 72 mm 72
– WC 78 mm 78

square follower size:
– 8 mm □ 08

handing details:
RH RS
LH LS

forend design
– stainless steel fine satin (material no. 1.4301) EST

Equipment

- self-tightening follower in galvanised steel
- steel-ring follower bearings
- latch bolt as galvanised steel casting
- deadbolt in rugged, heat-treated special-grade steel, bolt head as nickel-plated casting
- lock case wholly enclosed
- chip guards
- sound-damped latch
- relubrication facility

Options (please note delivery times)

- Flat forend with straight corners FK
- forend variant polished stainless steel
- stainless steel forend lacquered:
 - metallic silver silb
 - white white
- forend material polished brass (not for FH variant)
- backsets 70/80/100 mm 70 | 80 | 100
- 9 mm square follower hole (FH variant) 09
- 10mm square follower hole 10
- also obtainable in Class 3 (Series 50) and Class 4 (Series 51)

Example for article identification:

ES 52 PZW FR 24 | 55 72 08 EST
ES 52 WC FR 24 | 55 78 08 EST