


Product line 55 RoF

Mortice swing door lock with roller latch and bolt

according to DIN 18251-1
 for high usage doors
 with high user frequency



Classification code according to EN 12 209										
3	S	5	0	0	G	6	B	C	2	0

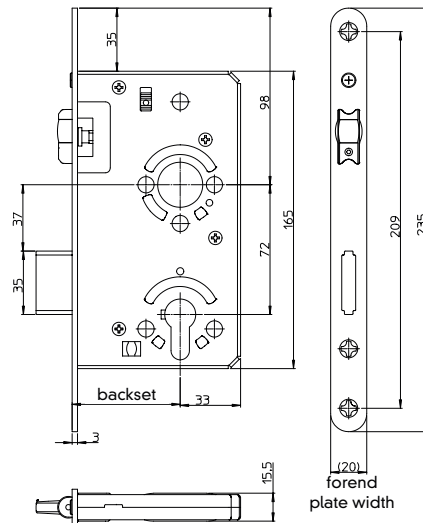

Mortice lock	ES
Product line 55	55
Lock with roller latch	RoF
PZ double-turn with key operated spring bolt	PZW
flat rounded - forend plate	FR
forend plate width - 20 / 24 mm	20
backset size 65 mm	65
centres PZ 72 mm	72
forend plate design - Stainless steel non-corroding precision-ground (Material no. 1.4301)	EST

Equipment:

- bolt made of high-strength refined steel
- bolt head cast nickel-plated
- lock case all-around closed, galvanized and lacquered
- sleeved bolt through fixing points
- relubrication system
- adjustable roller latch 2 - 9 mm

Options:

- flat forend edged **FK**
 - Front plate colours on stainless steel lacquered
 - silver metallic **silb**
 - white **white**
 - Front plate material
 - Brass polished (not for FH design) **mspo**
 - backset 70 / 80 / 100 mm **70**
 - square follower 9 mm (FH design) **09**
 - square follower 10 mm **10**
- (Consider delivery times)

Example for article identification

ES 55 RoF PZW FR 20 / 65 72 EST