


## Series 02 APD

for 1-leaf tubular-frame doors, transit function D,  
negotiable in both directions until locked  
again once opened from the inside, bolt throw 21 mm



- latch and dead bolt nickel-plated
- latch bolt with sound damping
- lock case enclosed at top and bottom
- hardware through-fixing above the lock follower
- chip guards
- self-tightening follower 9 mm, split
- angle of rotation of follower 26°

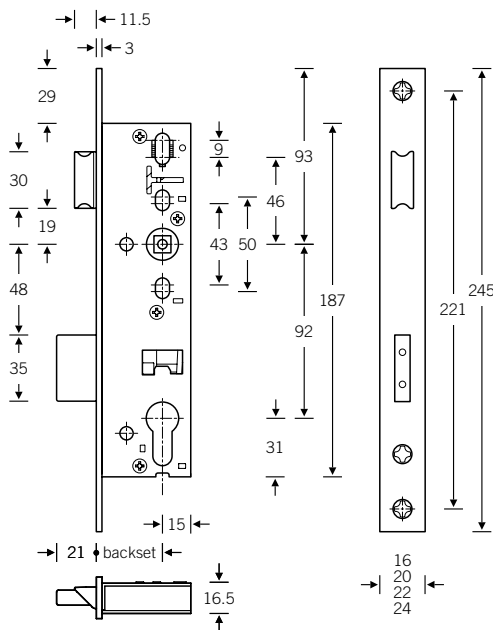

Tubular frame lock		RR
Series 02		02
PC 1-throw, Panic function D		APD
Flat forend	edged	FK
Forend width	24 mm 16 mm 20 mm 22 mm	24 16 20 22
Forend length	245 mm	245
Backset	35 mm 40 mm 45 mm 30 mm 50 mm	35 40 45 30 50
Centres	92 mm PC	92
Follower	9 mm □ FH, split	09
Handing	RH opening outwards LH opening outwards RH opening inwards LH opening inwards	RA LA RE LE
Forend version	Satin Stainless Steel	EST
U-shape forend 24 × 6 mm incl. end (for backset 34, 39 oder 44 mm)		U

latch and dead bolts with 5 mm projection  
(for backset 30, 35, 40, 45 mm)



Tested and quality-controlled  
by the North-Rhine Westphalian  
Materials Testing Institute in  
Dortmund

### Classification key

pursuant to EN 12209:  
3 M 5 1 0 C 3 B A 2 0  
pursuant to EN 179:  
3 7 6 B 1 4 4 1 A B\*  
3 7 6 B 1 4 4 1 A D\*\*  
pursuant to EN 1125:  
3 7 6 B 1 4 2 1 A B

\* opening outwards

\*\* opening inwards