


Product line ES 24

Mortice lock
 for internal doors
 according to DIN 18 251-1 Class 4



Classification code according to EN 12 209:										
3	S	5	1	0	G	4	H	C	2	0

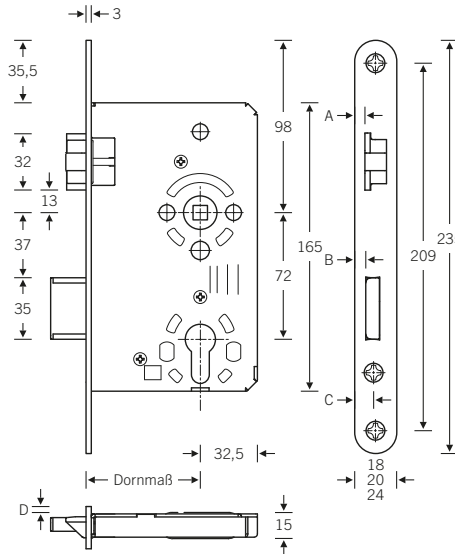

	Dimens. A	Dimens. B	Dimens. C	Dimens. D
18 mm	3,0	3,5	8,0	0,5
20 mm	3,4	3,9	8,5	1,0
24 mm	5,8	6,3	10,8	3,4

Mortice lock ES
 Product line 24 24

PZW double-turn with key operated PZW
 WC variant WC

flat rounded: FR

forend plate width:
 – 20 / 24 mm 20

backsets:
 – 55 / 60 / 65 mm 55

centres:
 – PZ 72 mm 72
 – WC 78 mm 78

square follower size:
 – 8 mm □ 08

handing details:
 – RH RS
 – LH LS

forend design stainless steel EST

Equipment

- Self-tightening follower in steel with galvanised-steel follower hole bush
- Folded-type follower in galvanised steel
- latch and deadbolt in galvanised steel, with thermally bonded guide elements in polyamide for the purpose of damping sound from the lock and latchbolt

Options (please note delivery times)

- Flat forend with straight corners FK
- forend plate width 18 mm 18
- forend variant:
- silver lacquered steel silb
- Hammer-gilded lacquered steel gold
- white lacquered steel white
- deadbolt lock RS
- warded-lock variant + 1 key BB

Example for article identification:

ES 24 PZW FR 20 | 55 72 08 RS EST